
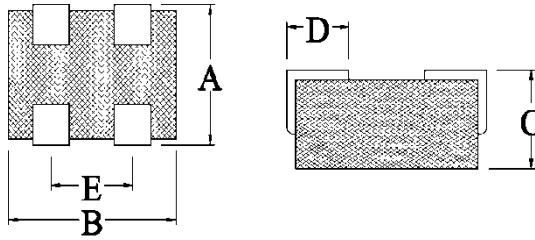


## ■ SPECIFICATIONS





No	Part No.	Impedance ( $\Omega$ )		DC Resistance ( $m\Omega$ )	Rated Current (A) $\Delta T=40^\circ C$	Dimensions (mm)				
		25MHz	100MHz			A	B	C	D	E
1	CJSMA 455625	23 ref.	35ref	$1.0^{+0}$	15 typ.	$4.8 \pm 0.30$	$5.6 \pm 0.20$	$3.0^{+0}$	$1.40 \pm 0.15$	$2.54 \pm 0.20$
2	CJSMA 855625	$34 \pm 25\%$	$52 \pm 25\%$	$10^{+0}$	15 typ.	$8.9 \pm 0.40$	$5.6 \pm 0.40$	$3.2^{+0}$	$1.50 \pm 0.50$	$2.60 \pm 0.50$

## ■ FEATURES

- Suitable for applications with higher current.
- High mechanical body.
- Stable characteristic.

## ■ CHARACTERISTIC CURVE

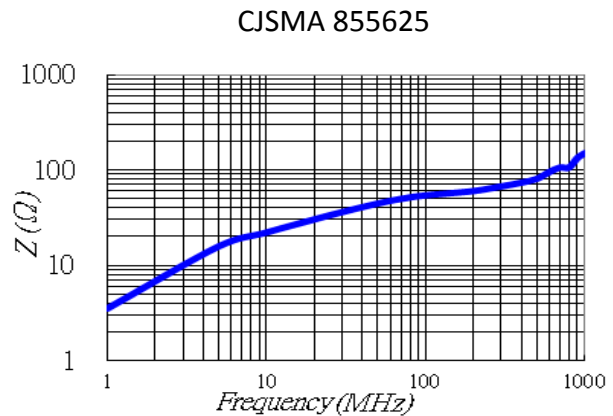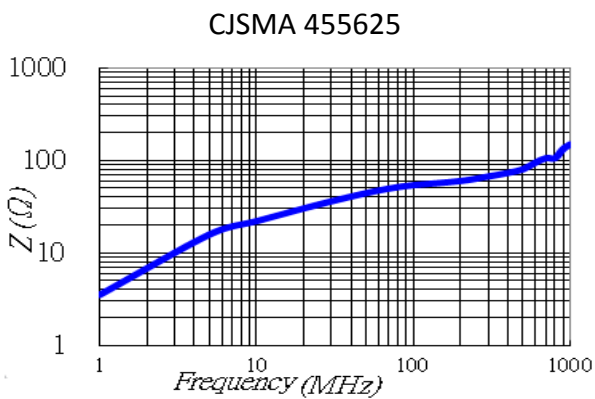

## ■ STANDARD PACKAGE QUANTITY (SPQ)

Type	CJSMA 455625		CJSMA 855625
Q'TY/Reel	500/7"x12	2,000/13"x12	2,400/13"x16