

SMD Ferrite Beads

CJSMB series

SPECIFICATIONS

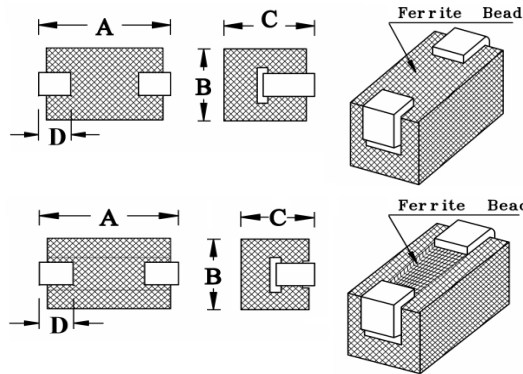
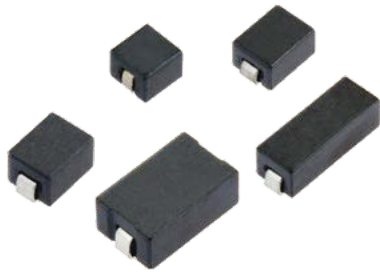


Figure 1

Figure 2


No	Part No.	Impedance (Ω)		DC Resistance ($m\Omega$)	Rated Current (A) $\Delta T=40^\circ\text{C}$	Dimensions (mm)				Type
		25MHz	100MHz			A	B	C	D	
1	CJSMB 323023I	$20 \pm 25\%$	$32 \pm 25\%$	0.6^{+0}	12 Max.	$3.08^{+0.1}_{-0.15}$	2.90 ± 0.10	2.5 Max	$0.80^{+0.20}_{-0.30}$	2
2	CJSMB 403022I	26 Min.	40 Min.	0.6^{+0}	12 Max.	5.0 Max.	3.0 ± 0.20	2.5 Max.	1.30 ± 0.25	2
3	★ CJSMB 403025	30 Min.	$47 \pm 20\%$	0.6^{+0}	12 Max.	5.0 Max.	3.1 ± 0.10	3.1Max.	1.35 ± 0.15	1
4	CJSMB 784730	$65 \pm 25\%$	98 typ	1.0^{+0}	12 Max.	8.8 Max.	4.75 ± 0.20	3.6 Max.	1.45 ± 0.30	1
5	★ CJSMB 853025	60 Min.	$90 \pm 20\%$	1.0^{+0}	12 Max.	9.5 Max.	3.1 ± 0.10	3.1 Max.	1.70 ± 0.40	1

★ popular item

FEATURES

- Suitable for applications with higher current.
- High mechanical body.
- Stable characteristic.

CHARACTERISTIC CURVE

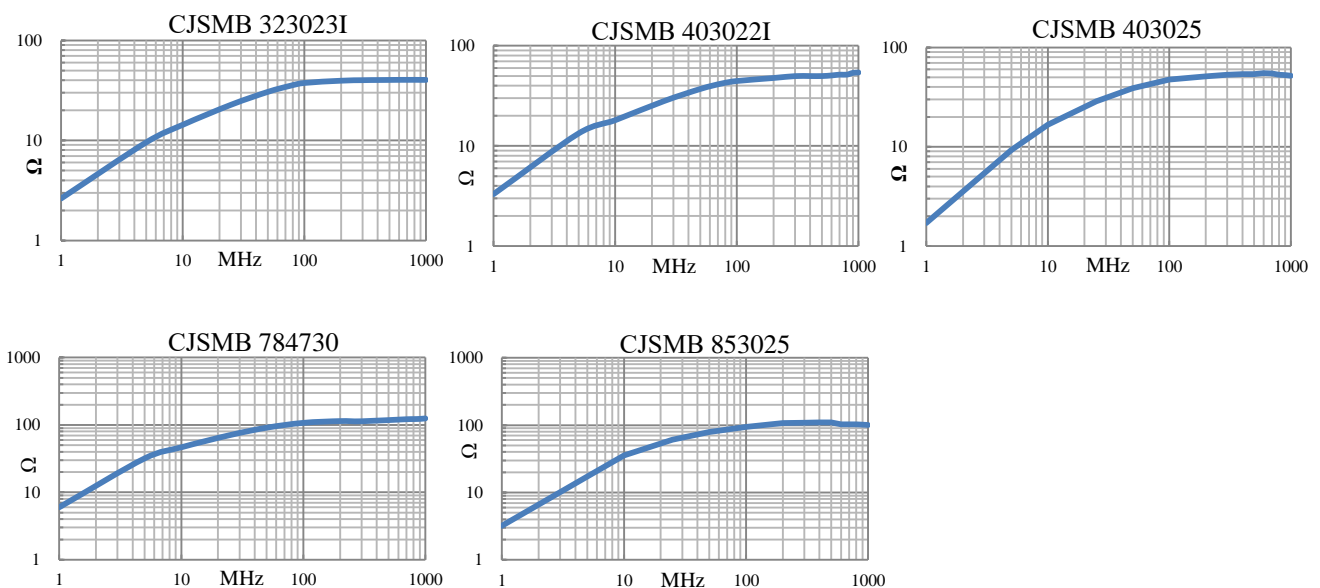

STANDARD PACKAGE QUANTITY (SPQ)

Type	CJSMB 3230231	CJSMB 4030221	CJSMB 403025	CJSMB 784730	CJSMB 853025
QTY/Reel	1,000	500	500	500	500